



ELEMENTOS TENSORES RESATEC TIPO "TE"

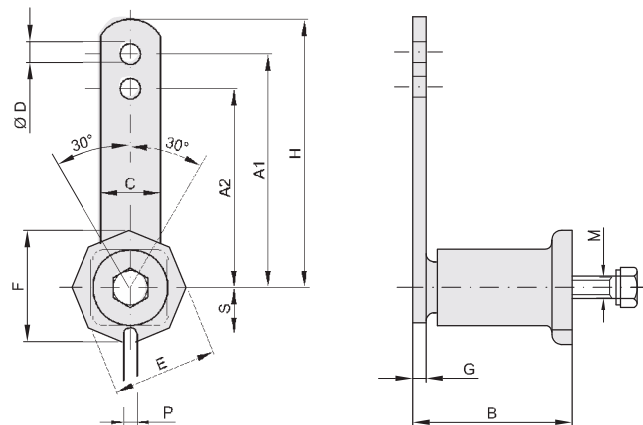

Código	A1	A2	B	C	Ø D	E	F	G	H	Forza max in N Troque in N<0-32° A1 A2		M	P	S	Kg.
TE 2	80	60	52	20	8,5	35	38	5	90	0-90 0-110		M 6	8	16	0,25
TE 3	100	80	63	25	10,5	46	48	5	112,5	0-140 0-170		M 8	8,5	21	0,45
TE 4	100	80	78	30	10,5	56	59	6	115	0-320 0-430		M10	8,5	25	0,68
TE 5	130	100	108	50	12,5	72	76	8	155	0-820 0-1050		M12	10,5	32	1,95
TE 6	175	140	140	60	20,5	93	97	10	205	0-1500 0-1880		M16	12,5	41	3,70
TE 7	220	175	198	70	20,5	106	112	12	255	0-2500 0-3200		M20	12,5	51	6,50

ELEMENTOS TENSORES RESATEC TIPO "KS" DIN 8187

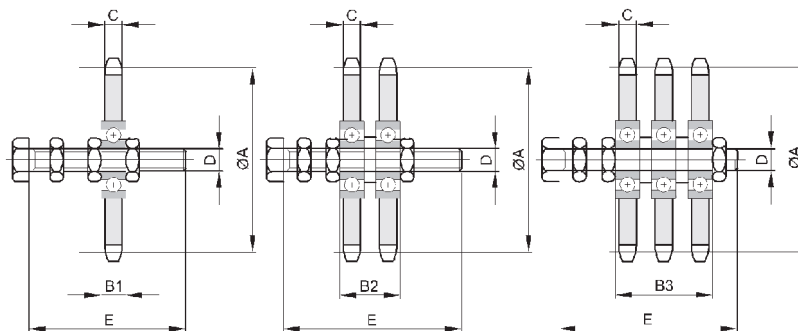

Código	ISO	Denti	Ø A	B1	B2	B3	C	D	E	Simple Kg.	Doble Kg.	Triple Kg.
KS 3/8" x 7/32"	06B-1-2-3	15	45,81	9	19,2	29,4	5,7	M10	60	0,15	0,20	0,25
KS 1/2" x 5/16"	08B-1-2	15	61,08	9	22,9		7,2	M10	606	0,20	0,35	
KS 1/2" x 5/16"	08B-1-2-3	15	61,08	12	26,0	40,0	7,2	M12	80	0,23	0,45	0,50
KS 5/8" x 3/8"	10B-1-2-3	15	76,36	12	28,6	45,2	9,1	M12	80	0,37	0,60	0,95
KS 5/8" x 3/8"	10B-1-2-3	15	76,36	15	31,5	48,2	9,1	M20	120	0,70	1,00	1,25
KS 3/4" x 7/16"	12B-1-2	15	91,63	12	31,5		11,5	M12	80	0,60	1,05	
KS 3/4" x 7/16"	12B-1-2-3	15	91,63	15	34,5	54,0	11,5	M20	120	0,90	1,35	1,50
KS 1" x 17,02 mm	16B-1-2-3	13	106,14	15	46,9	78,8	16,2	M20	120	1,30	2,10	2,90
KS 1 1/4" x 3/4"	20B-1-2-3	13	132,67	15	51,5	88,0	18,5	M20	140	2,05	3,60	5,20
KS 1 1/2" x 1"	24B-1-2-3	11	135,23	15	63,4	111,8	111,8	M20	160	2,40	4,25	6,20